




ABOVE: LIGHT GREY (FLOOR)
COVER: GRAFITTI

	Technical Specifications	Standard Requirements	Test Results
	Water Absorption UNI EN ISO 10545-03	E ≤ 0.5%	≤ 0.5%
	Breaking Strength UNI EN ISO 10545-04	≥ 1300 N	≥ 1500 N
	Modulus of Rupture UNI EN ISO 10545-04	> 35 N/mm ²	≥ 37 N/mm ²
	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: E > 0.55	Resistant
	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm ³	N/A
	Thermal Linear Expansion UNI EN ISO 10545-08	As Reported	65 x 10 ⁻⁵ /°C ⁻¹
	Thermal Shock Resistance UNI EN ISO 10545-09	Required	Resistant
	Moisture Expansion UNI EN ISO 10545-10	As Reported	≤ 0.6 mm/m
	Frost Resistance UNI EN ISO 10545-12	As Reported	Resistant
	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: GB Acids and Alkalis: As Reported	GB GLB
	Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	Class 3
	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	III
	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: > 0.42	≥ 0.42
	Shade Variation	As Reported	V3
	Thickness	As Reported	12' x 24" - 8.5 mm 24' x 24" - 8.5 mm
	Number of Screens	As Reported	12' x 24" - 16 24' x 24" - 8



Grout joint required for rectified edge
tile 1/2 broken joint not recommended



MANUFACTURER RECOMMENDS 1/3 OR LESS STAGGERED SPACING



INSTALLATION TIPS



Use a leveling system during
installation to reduce lippage



HAPPY FLOORS



≥ 20%



The data refers to first choice material in the natural version.



STONE

SOFT STONE

RECTIFIED PORCELAIN






GRAFITTI (FLOOR)

SOFT STONE

Soft Stone brings elevated minimalism to living spaces with diagonal movements throughout its distribution. This collection's soft momentum creates sophisticated visual interest

effortlessly. Available in three neutral greys with an assortment of tone shifts in each, Soft Stone lends itself to a variety of design possibilities.

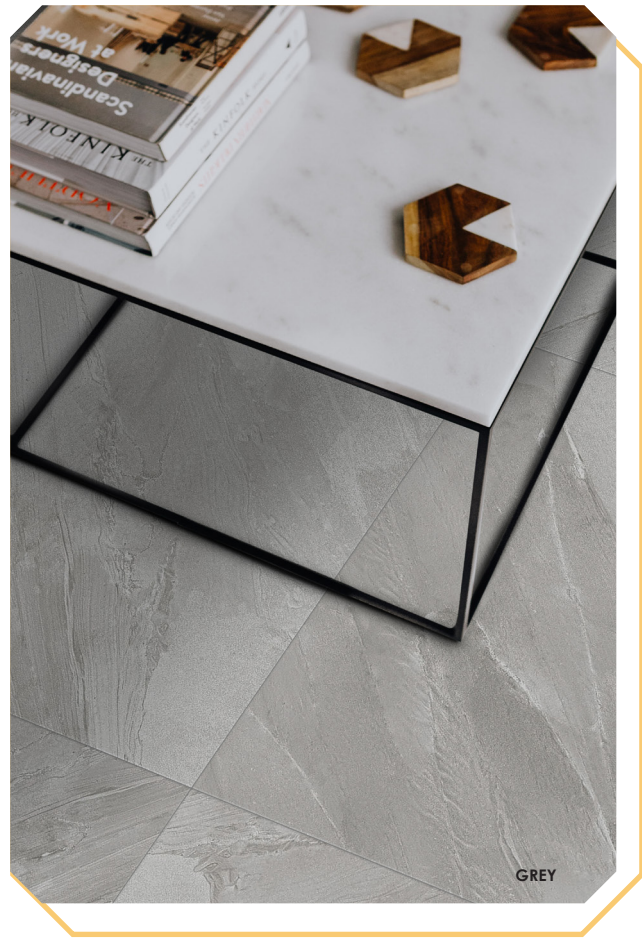


GREY

FORMATS

LIGHT GREY



24" x 24"



12" x 24"



2" x 2" Mosaic (12" x 12" Sheet)



3" x 24" Bullnose


GREY



24" x 24"



12" x 24"




2" x 2" Mosaic (12" x 12" Sheet)




3" x 24" Bullnose


GRAFITTI



24" x 24"



12" x 24"



2" x 2" Mosaic (12" x 12" Sheet)



3" x 24" Bullnose

ALL FORMATS AVAILABLE IN NATURAL FINISH



LIGHT GREY (FLOOR)